

Product Specification

Type	EC Axial Fan
Model	BL-A200C-EC-02S


Norminal Data

Phase	~	1
Nominal Voltage	VAC	230
Frequency	Hz	50/60
Nominal Speed	RPM	3600
Max. Input Power	W	115
Max. Input Current	A	0.85
Sound level	dBA	64
Certification	~	CCC
Min. Ambient Temperature	°C	-25
Max. Ambient Temperature	°C	60


Technical Features

Dimensions	225*225*80mm
Material of Impeller	Plastic
Direction of Rotation	Clockwise, Seen on Rotor
Surface of Rotor	Plastic Spraying
Type of Protection	IP55
Insulation Class	B
Operation Mode	S1
Motor Bearing	Ball Bearing
Motor Protection	Locked Rotor Protection, Termal Protection, Less and Excessive Voltage Protection, Overcurrent Protection, Soft Start
Length of Cable	500±20mm
RoHS	All Material According with RoHS
Min./Max. Humidity	5% - 90% RH
Motor	External Rotor EC Motor
Deviation of Impeller In Axial Direction	≤ 0.5 mm
Deviation of Impeller In Radial Direction	≤ 0.5 mm

Air Performance

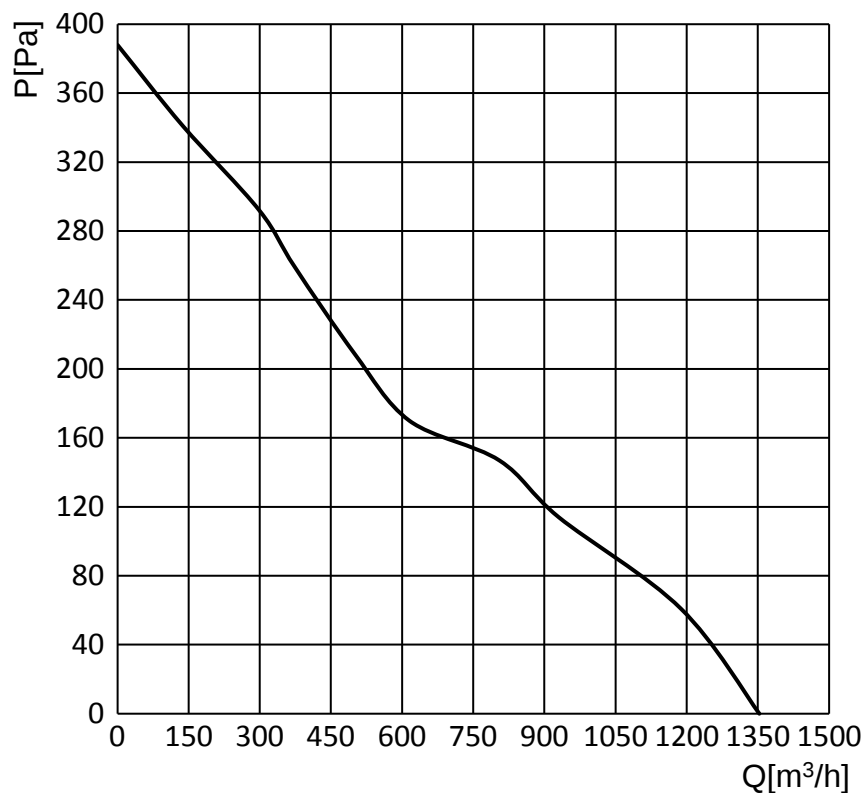


Outline Drawing

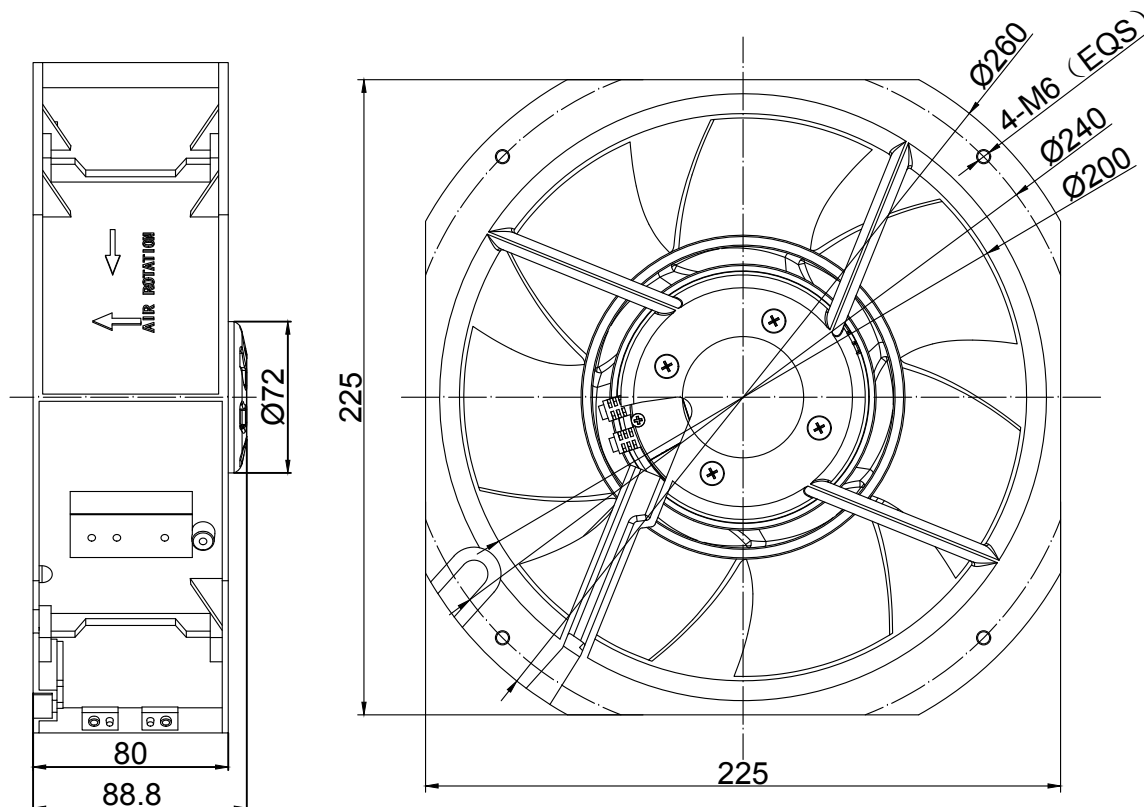


Wiring Diagram

Line	Connection		Color	Function
Power Line	PE		GreenYellow	Protective Earth
	U1	L	Brown	Live Wire
	U2	N	Blue	Neutral Wire
Control Line	U4	+10V	Red	External output +10VDC
	U5	Speed Control	Yellow	0~10V & PWM Compatible Line (PWM recommends an amplitude of 10V)
	U6	Signal Feedback	White	RPM Output Signal Line
	U7	GND	Blue	GND

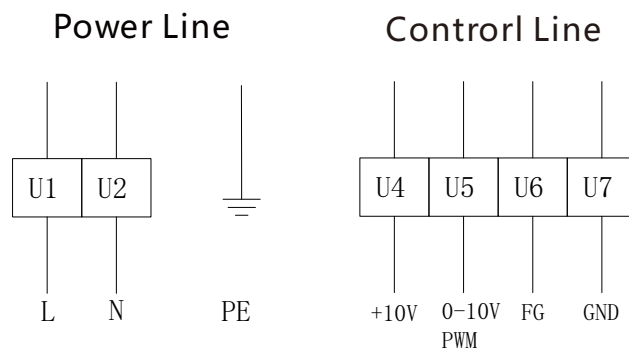

The fan has a speed output signal, the output signal waveform diagram is shown in the figure below, V_{fg} and pull-up resistor are the external part for customers, $V_{fg} = (3-30)VDC$, $R \geq 1000 \times (V_{fg}) \Omega$

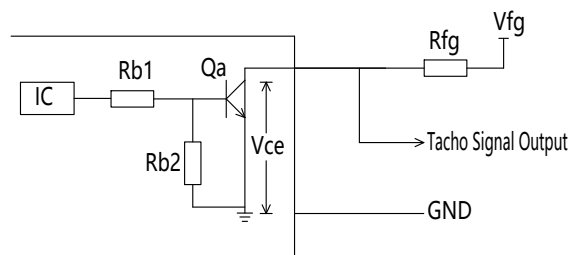

Additional Notes

- 1.The power line and control line of the fan should be connected in strict accordance with the wiring diagram to prevent the fan from burning out;
- 2.Do not connect the white signal wire directly to the red signal wire or the external DC power supply;
- 3.If the fan does not work after starting, please check the input voltage of the speed regulation, which may be improperly connected. To prevent hand or other personal injury caused by sudden start of the fan; Do not touch the impeller or rotor after electrifying;
- 4.It takes a few seconds for the fan to start after power on. In order to prevent personal injury, do not touch the impeller or rotor under the condition of power or low speed;
- 5.Persons lacking physical, mental or sensory abilities and appropriate practical experience or expertise cannot use the fan unless directed by a person responsible for its safety. Keep out of reach of children.
- 6.If the power line is damaged, the manufacturer must replace the power cord;
- 7.As a part of the fan, the motor cannot be used alone without impeller or load;
- 8.After the product packaging has been disassembled, it should be repackaged if it needs to be kept in storage. The product shall be stored in a clean, well-ventilated warehouse with ambient temperature of $-40^{\circ}\text{C}\sim +80^{\circ}\text{C}$, relative humidity of no more than 95%, no corrosive gases in the air, and 15cm above the ground.
- 9.Please read this technical specification carefully before use.